


## Notes

1. Existing Permeable or Impermeable Subgrade - Undisturbed or graded if required.
2. Geotextile Fabric - 220R Terrafix or approved equivalent, with double bead of exterior grade construction adhesive applied to standard 12" (300 mm) seam overlaps.
3. Granular Drainage Base - Typical 3" (80 mm) depth of 3/4" (19 mm) clear stone, manually compacted and leveled to +/- 1/2" over 10'.
4. Protective Surfacing - Engineered Wood Fibre/Rubber Mulch or CSA/ASTM approved equivalent. Depth will vary dependant on fall height requirement.
5. Poly Timber Perimeter - Molded interlocking polyethylene retaining wall, secured with 30" aluminum stakes. Available in multiple colours, straight and curved.



\*Note: Drawing Not-to-Scale (for illustrative purposes only)

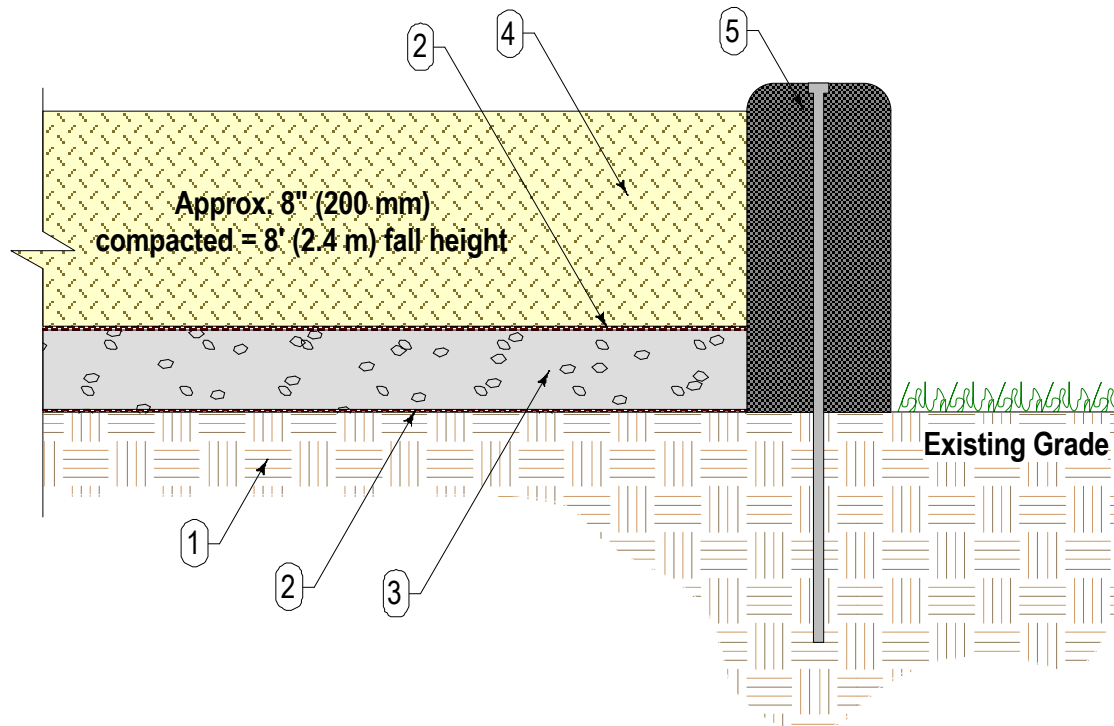

ACTIVE Playground Equipment  
124-B Kendall St.  
Point Edward, ON  
Canada  
N7S 4G5

1.800.463.2361

[info@ApePlayground.com](mailto:info@ApePlayground.com)

## Standard Base Prep:

Engineered Wood Fibre  
or Rubber Mulch  
Above Grade  
Poly Timber Perimeter

