


Notes

1. Existing Permeable or Impermeable Subgrade - compacted to 95% S.P.D.
2. Subsoil Base - Excavated to a min. depth determined by required fall height with a 1% to 2% slope to ensure positive surface drainage.
3. Geotextile Fabric - 220R Terrafix or approved equivalent, with double bead of exterior grade construction adhesive applied to standard 12" (300 mm) seam overlaps.
4. Granular Drainage Base - Typical 3" (80 mm) depth of 3/4" (19 mm) clear stone, manually compacted and leveled to +/- 1/2" over 10'.
5. Protective Surfacing - Engineered Wood Fibre or CSA/ASTM approved equivalent. Depth will vary dependant on fall height requirement.
6. Concrete Curb Perimeter (optional) - Standard 6" (150 mm) poured concrete curb or similar, variable depth, raised or flush with grade.



*Note: Drawing Not-to-Scale (for illustrative purposes only)

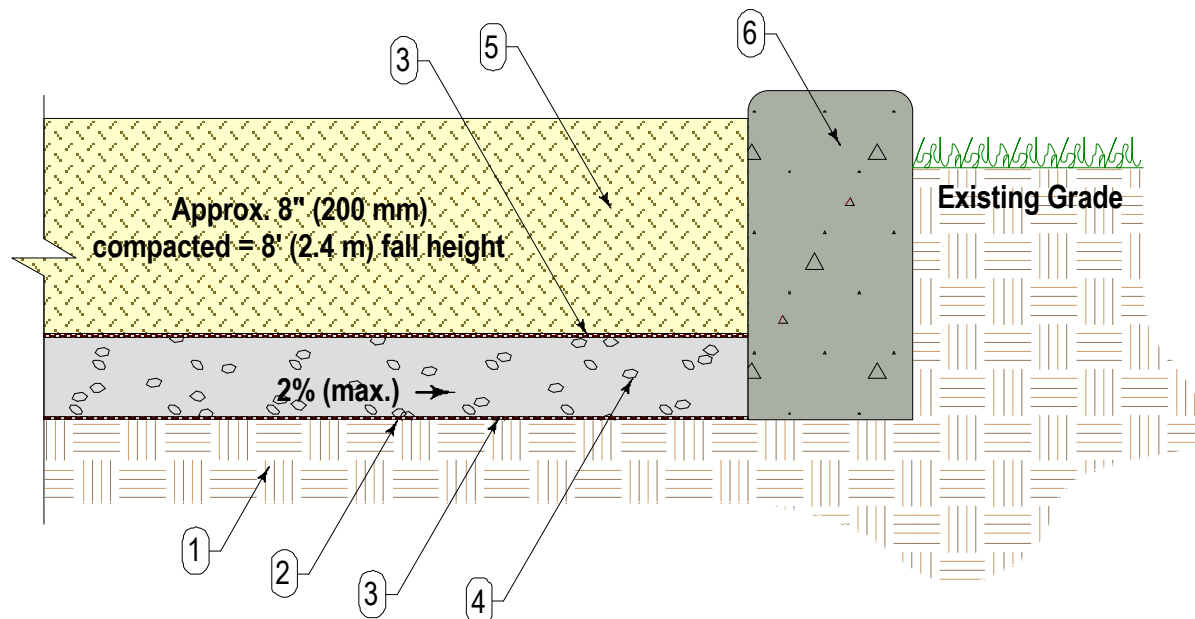

ACTIVE Playground Equipment
124-B Kendall St.
Point Edward, ON
Canada
N7S 4G5

1.800.463.2361
info@ApePlayground.com

Standard Base Prep:
Engineered Wood Fibre
Below Grade
Concrete Curb Perimeter

